

TECHNICAL INFORMATION

Baselift 6210

Installation: Floor

Adjustability: Motor-driven, continuously adjustable 30.0 cm (65.0 - 95.0 cm excl. worktop)

Speed: 1.8 cm / sec.

Operation: Built-in button or radio control

Safety: A security strip is located below the worktop's front edge. Contact with the strip stops the lift

Electrical connection: Mains plug for 230 V, max 2.5A

Connection of water and drainage: Connection is by means of flexible hoses

Max. load: 150 kg (59.0-180.0 cm), 250 kg (189.0-340.0 cm)

Enclosure-class: IP 20

Frame depth: 56.0 - 58.0 cm from wall

Front height: 11.8 - 12.5 cm

Dimensions cover plates: Width = Lift's width, Height 43.8 cm, Thickness 1.2-1.6 cm

Depth worktop: 58.5 - 63.5 cm

Width (model 6210): 59.0 - 340.0 cm

Width (model 6211): 105.0 - 255.0 cm

Width (model 6212): 105.0 - 255.0 cm

Width (model 6213): 80.0 - 260.0 cm

Space laterally to wall / adjoining cupboard: 0.5 cm

Space to wall (for tiles): 1.5 cm

Tiling: From 65.0 cm above floor (alternatively right down to floor)

Delivery modules: Assembled work surface incl. safety switch. Floor mounted motors.

Fittings supplied: Attachments for fronts


Material: Frame and motors in aluminium. Powder coated sheet-metal parts (Alu-grey RAL 9006)



DIMENSIONS


(cm)

Dimensions worktop - Model 6210

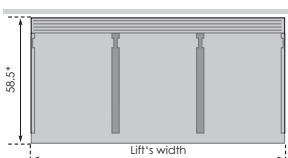


* Relates to 60.0 cm depth of adjoining worktop
(This gives a 1.5 cm space for tiles and movement)

Dimensions worktop - Model 6211

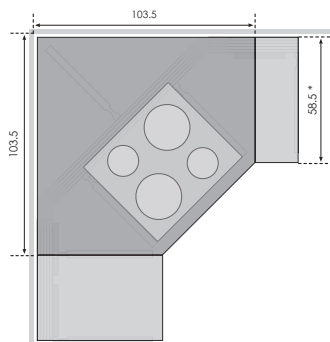


* Relates to 60.0 cm depth of adjoining worktop
(This gives a 1.5 cm space for tiles and movement)

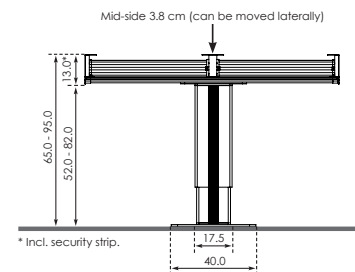


* Incl. security strip.

Dimensions worktop - Model 6212

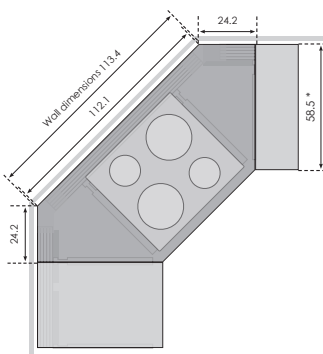


* Relates to 60.0 cm depth of adjoining worktop
(This gives a 1.5 cm space for tiles and movement)

Dimensions worktop - Model 6213

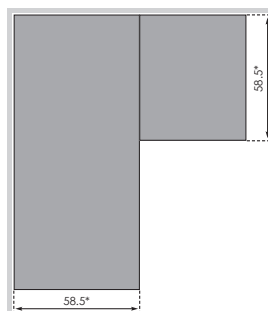

* Relates to 60.0 cm depth of adjoining worktop
(This gives a 1.5 cm space for tiles and movement)





www.inclusiveliving.com.au
1300 304 330