GRANBERG

Inclusive Living
Australia
www.inclusiveliving.com.au
1300 304 330

BASELIFT Corner 6302 / 6312

Wall-mounted or floor-mounted motorised corner worktop lift, 45° front edge, 45° wall

BASELIFT Corner 6302/6312 is a motorised corner worktop lift with 45° front edge and 45° rear edge. Choose between wall-mounted or floor-mounted motors.

Available in high (H) front profile for installation of sinks, cooktops and drawers or low (L) front profile for installation of cooktops . Open area below/under worktop provides space for legs and knees, allowing easy access for seated positions. Installations under the worktop (motors, plumbing) can be concealed by tel-escopic cover panels which provides a discreet appearance. The lift is equipped with a reliable safety system for safe operation.

Electric operation is easy to use, worktops can be lowered or raised vertically to desired height.
Sinks and cooktops can be fitted, if required. The lift is prepared in the factory to facilitate easy installation.

MADE IN SWEDEN

BASELIFT Corner 6302 / 6312

Functions and advantages

- Motorised corner worktop lift, 45° front edge, 45° wall
- Hob or sink bowl can be mounted in the corner module
- Height-adjustable 70-100 cm above the floor (excl. top board)
- The frame depth is adjustable 56-59 cm to fit adjoining cabinet
- The upper part of the lifting system is delivered ready-mounted. The sides are pre-assembled and adjustable sideways to suit the sink, hob and drawers
- The lifting system is adjustable at an angle to compensate for an inclined wall
- Integrated safety switch
- 10 cm free space under motors for electrical installation and piping. (Applies to wall-mounted model)
- Choose floor-mounted model if there is no stable wall

Standard equipment

- Factory-mounted aluminium system with movable and tiltable brackets
- Wall-mounted or floor-mounted motors
- Safety switch

Recommended additional options

- Control button
- Front
- Hose cover/cover panels
- Sink *(Not 6302L/6312L)*
- Drawer *(Not 6302L/6312L)*
- Rear edge trim
- Safety lock

Useful information

- Fittings for top board and fronts enclosed
- The top board's depth must be 15 mm shallower than adjoining top boards *(to provide a gap for tiles and movement)*
- Width of the top board = width of the lift
- Sink bowls with a maximum height of 120 mm can be integrated (Not 6302L/6312L)
- Electronics and motor system "Plug and Play"
- Width of front = width of lift -4 mm
  Height of front: 6302H/6312H = 103 mm, 6302L/6312L = 40 mm
  Fittings enclosed
- Cover panels can hide installations under the worktop
  2 pcs, height 438 mm, thickness 12-20 mm

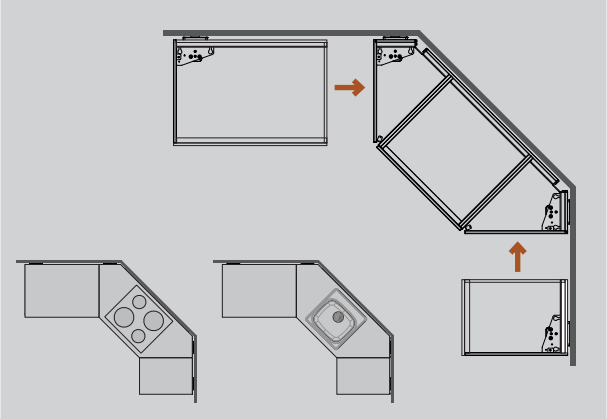

The corner module is equipped with two motors and can be used as one unit. Supplement with Plus modules to obtain the desired length on the left and right wings. A hob or sink bowl can be placed in the corner.

Specify the position of the drawers, sink and hob
The worktop is prepared in the factory. Drawers are mounted and sides assembled to facilitate the final mounting on the spot.

WALL-MOUNTED

6302H

6302L

FLOOR-MOUNTED

6312H

6312L

Specifications

Mounting	Wall or floor
Corner solution	45° front edge, 45° wall
Height adjustment	Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)
Speed	30 mm / sec.
Manoeuvring	Recessed mounted button or radio control
Safety	The safety strip is placed under the front edge of the worktop. If anything touches the safety strip, the lifting unit stops
Electricity connection	Plug for 230 V, max 5.0 A
Plumbing connections	Connection is made with flexible hoses
Lifting power	100 kg
IP Class	IP 20
Frame depth	560-590 mm from wall
Front height	40 or 103 mm
Dimensions cover panels	2 pcs, height 438 mm, thickness 12-20 mm
Width top board	Width = width of the lift
Depth top board	565-630 mm (15 mm shallower than worktops on fixed cabinets)
Gap to the side to wall/adjoining cabinet	5 mm
Gap to wall (for tiling)	15 mm
Tiling	From 700 mm above floor (alternatively all the way down to the floor)
Delivery modules	Ready-mounted worktop incl. safety switch, motors
Fittings enclosed	Bracket for fronts and top board
Material specifications	Aluminium frame
Guarantee	2 years
	CE

Measurement data

(mm)

WALL-MOUNTED: 6302H/6302L

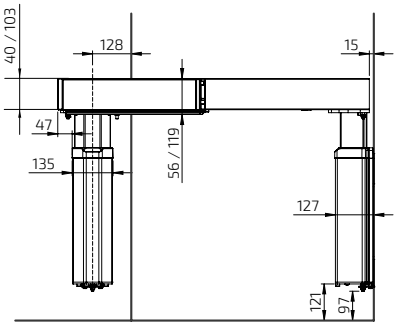

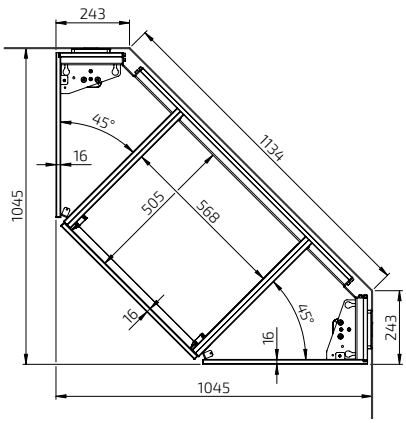

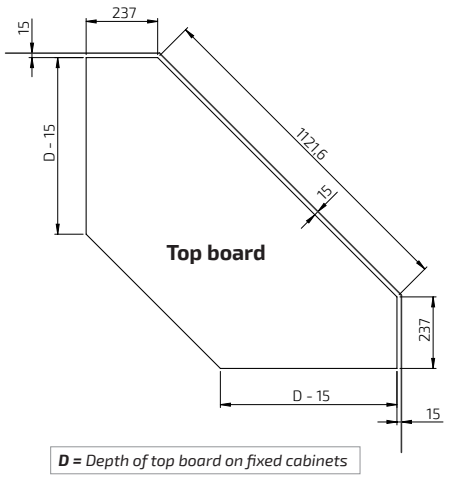

***D** = Depth of top board on fixed cabinets*

FLOOR-MOUNTED: 6312H / 6312L

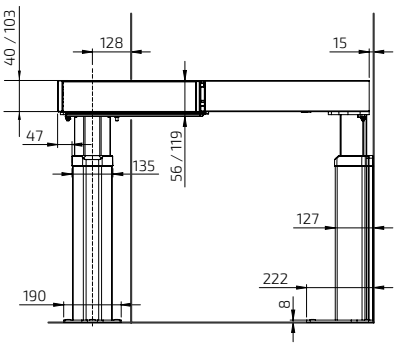

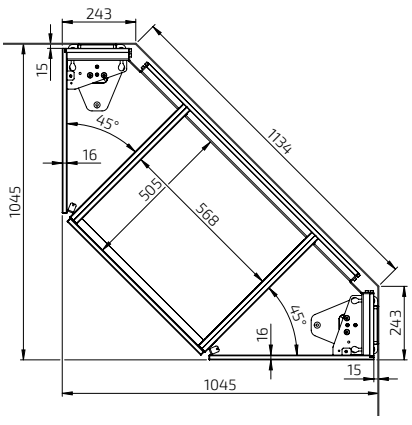

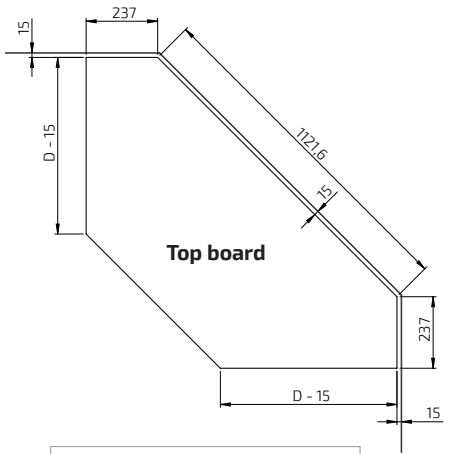

***D** = Depth of top board on fixed cabinets*

BASELIFT Corner 6302HA - Wall-mounted

Lifting unit 104.5 x 104.5 cm
For 103 mm front
Frame depth 56.0 - 59.0 cm
2 motors
Safety switch

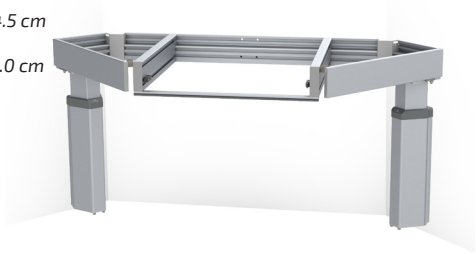

	Width (cm)	Art. no.
	104.5	6302HA-1045
Plus module Left 6305HA, 40.0-100.0 cm	40.0	6305HA-040
	50.0	6305HA-050
	60.0	6305HA-060
	70.0	6305HA-070
	80.0	6305HA-080
	90.0	6305HA-090
	100.0	6305HA-100
Plus module Left 6305HA, 110.0-180.0 cm	110.0	6305HA-110
	120.0	6305HA-120
	130.0	6305HA-130
	140.0	6305HA-140
	150.0	6305HA-150
	160.0	6305HA-160
	170.0	6305HA-170
	180.0	6305HA-180
Plus module Left 6305HA, 190.0-240.0 cm	190.0	6305HA-190
	200.0	6305HA-200
	210.0	6305HA-210
	220.0	6305HA-220
	230.0	6305HA-230
	240.0	6305HA-240
Plus module Right 6306HA, 40.0-100.0 cm	40.0	6306HA-040
	50.0	6306HA-050
	60.0	6306HA-060
	70.0	6306HA-070
	80.0	6306HA-080
	90.0	6306HA-090
	100.0	6306HA-100
Plus module Right 6306HA, 110.0 - 180.0 cm	110.0	6306HA-110
	120.0	6306HA-120
	130.0	6306HA-130
	140.0	6306HA-140
	150.0	6306HA-150
	160.0	6306HA-160
	170.0	6306HA-170
	180.0	6306HA-180
Plus module Right 6306HA, 110.0 - 180.0 cm	190.0	6306HA-190
	200.0	6306HA-200
	210.0	6306HA-210
	220.0	6306HA-220
	230.0	6306HA-230
	240.0	6306HA-240

BASELIFT Corner 6302HA - Floor-mounted

Lifting unit 104.5 x 104.5 cm
For 103 mm front
Frame depth 56.0 - 59.0 cm
2 motors
Safety switch

	Width (cm)	Art. no.
	104.5	6312HA-1045
Plus module Left 6315HA, 40.0 - 100.0 cm	40.0	6315HA-040
	50.0	6315HA-150
	60.0	6315HA-060
	70.0	6315HA-070
	80.0	6315HA-080
	90.0	6315HA-090
	100.0	6315HA-100
Plus module Left 6315HA, 110.0 - 180.0 cm	110.0	6315HA-110
	120.0	6315HA-120
	130.0	6315HA-130
	140.0	6315HA-140
	150.0	6315HA-150
	160.0	6315HA-160
	170.0	6315HA-170
	180.0	6315HA-180
Plus module Left 6315HA, 190.0 - 240.0 cm	190.0	6315HA-190
	200.0	6315HA-200
	210.0	6315HA-210
	220.0	6315HA-220
	230.0	6315HA-230
	240.0	6315HA-240
Plus module Right 6316HA, 40.0 - 100.0 cm	40.0	6316HA-040
	50.0	6316HA-050
	60.0	6316HA-160
	70.0	6316HA-070
	80.0	6316HA-080
	90.0	6316HA-090
	100.0	6316HA-100
Plus module Right 6316HA, 110.0 - 180.0 cm	110.0	6316HA-110
	120.0	6316HA-120
	130.0	6316HA-130
	140.0	6316HA-140
	150.0	6316HA-150
	160.0	6316HA-160
	170.0	6316HA-170
	180.0	6316HA-180
Plus module Right 6316HA, 190.0 - 240.0 cm	190.0	6316HA-190
	200.0	6316HA-200
	210.0	6316HA-210
	220.0	6316HA-220
	230.0	6316HA-230
	240.0	6316HA-240

Control button in ALU-design

Wired, for recessed mounting
Dimensions: 82 x 82 x 17 mm

	61320

Control button, Mini

Wired, for recessed mounting
Diameter: 20 mm

	61318

Multi-compartment frame, Alu-design
Collects power socket, power switch or control buttons in a multi-compartment frame.

Two-compartment frame: 153 x 82 x 9 mm	61352
Three-compartment frame: 225 x 82 x 9 mm	61353

Safety lock
Prevents unauthorised use.
Dimensions: 23 x 9 mm

	61360

Front, white-lacquered aluminium
Replace xxx with cm when ordering.
Example, 385H-040-01 for 40.0 cm

Lacquered aluminium, white RAL 9003
Height: 103 mm

Optional length, 20.0-340.0 cm	385H-xxx-01

Front, anodised aluminium
Replace xxx with cm when ordering.
Example, 385H-040-06 for 40.0 cm

Anodised aluminium
Height: 103 mm

Optional length, 20.0-340.0 cm	385H-xxx-06

Integrated drawer with full extension and soft-close or push-to-open function
Depth: 470 mm, height: 85 mm
Colour: Anthracite (RAL 9004)

30.0 cm	465H-030
40.0 cm	465H-040
50.0 cm	465H-050
60.0 cm	465H-060
80.0 cm	465H-080
30.0 cm - Push-to-open function	466H-030
40.0 cm - Push-to-open function	466H-040
50.0 cm - Push-to-open function	466H-050
60.0 cm - Push-to-open function	466H-060
80.0 cm - Push-to-open function	466H-080

Cutlery compartment

Fits 30.0 cm wide drawer	463-030
Fits 40.0 cm wide drawer	463-040
Fits 50.0 cm wide drawer	463-050
Fits 60.0 cm wide drawer	463-060
Fits 80.0 cm wide drawer	463-080

Safety strip
Used if pinch protection is desired on the gable end (by an open side).
Length: 370 mm, Height: 10 mm

	61430

Safety panel, short end
Used when the worktop lift's underside passes over adjoining furnishings.
Height: 263 - 800 mm, Depth: 400 mm
For a worktop lift with cover panels

Left	61442
Right	61443

Safety panel, short end
Used when the worktop lift's underside passes over adjoining furnishings.
Height: 263 - 800 mm, Depth: 545 mm
For a worktop lift without cover panels

Left	61444
Right	61445



Hob cover under worktop lift
Provides a smooth underside. Used under the hob.

White-lacquered metal RAL 9003

60.0 cm	6266-060
70.0 cm	6266-070
80.0 cm	6266-080
90.0 cm	6266-090
100.0 cm	6266-100

Cover panels
Used to cover installations under the worktop.

12 mm white melamine, 2 pcs height 438 mm

2 pcs are required for lengths over 2400 mm	6260-240

Fittings set for cover panels
Used to mount cover panels that conceal installations under the worktop.

Colour: Alu-grey RAL 9006

2 pcs are required for lengths over 2400 mm	6260-005



Hose cover
The hose cover is mounted anywhere under the worktop, (next to motors, if applicable) to provide a neat coverage of hoses when the cover panels are not in use. Fittings are included.

Width: 410 mm, Depth: 200 mm

White plastic	61504-01
Grey plastic	61504-06



Rear edge trim in aluminium for top board
Mounted behind top board. Brushed aluminium
Height above top board: 20 mm
Thickness behind top board: 3 mm

(per metre)	6943-06

Height-adjustment kit
Used to change stroke after installation.
Contains programming box and memory adapter.

	61400

BASELIFT Corner 6302LA - Wall-mounted

Lifting unit 104.5 x 104.5 cm
For 40 mm front
Frame depth 56.0 - 59.0 cm
2 motors
Safety switch

	Width (cm)	Art. no.
	104.5	6302LA-1045
Plus module Left 6305LA, 40.0-100.0 cm	40.0	6305LA-040
	50.0	6305LA-050
	60.0	6305LA-060
	70.0	6305LA-070
	80.0	6305LA-080
	90.0	6305LA-090
	100.0	6305LA-100
Plus module Left 6305LA, 110.0-180.0 cm	110.0	6305LA-110
	120.0	6305LA-120
	130.0	6305LA-130
	140.0	6305LA-140
	150.0	6305LA-150
	160.0	6305LA-160
	170.0	6305LA-170
	180.0	6305LA-180
Plus module Left 6305LA, 190.0-240.0 cm	190.0	6305LA-190
	200.0	6305LA-200
	210.0	6305LA-210
	220.0	6305LA-220
	230.0	6305LA-230
	240.0	6305LA-240
Plus module Right 6306LA, 40.0 - 100.0 cm	40.0	6306LA-040
	50.0	6306LA-050
	60.0	6306LA-060
	70.0	6306LA-070
	80.0	6306LA-080
	90.0	6306LA-090
	100.0	6306LA-100
Plus module Right 6306LA, 110.0 - 180.0 cm	110.0	6306LA-100
	120.0	6306LA-120
	130.0	6306LA-130
	140.0	6306LA-140
	150.0	6306LA-150
	160.0	6306LA-160
	170.0	6306LA-170
	180.0	6306LA-180
Plus module Right 6306LA, 190.0 - 240.0 cm	190.0	6306LA-190
	200.0	6306LA-200
	210.0	6306LA-210
	220.0	6306LA-220
	230.0	6306LA-230
	240.0	6306LA-240

BASELIFT Corner 6312LA - Floor-mounted

Lifting unit 104.5 x 104.5 cm
For 40 mm front
Frame depth 56.0 - 59.0 cm
2 motors
Safety switch

	Width (cm)	Art. no.
	104.5	6312LA-1045
Plus module Left 6315LA, 40.0 - 100.0 cm	40.0	6315LA-040
	50.0	6315LA-150
	60.0	6315LA-060
	70.0	6315LA-070
	80.0	6315LA-080
	90.0	6315LA-090
	100.0	6315LA-100
Plus module Left 6315LA, 110.0 - 180.0 cm	110.0	6315LA-110
	120.0	6315LA-120
	130.0	6315LA-130
	140.0	6315LA-140
	150.0	6315LA-150
	160.0	6315LA-160
	170.0	6315LA-170
	180.0	6315LA-180
Plus module Left 6315LA, 190.0 - 240.0 cm	190.0	6315LA-190
	200.0	6315LA-200
	210.0	6315LA-210
	220.0	6315LA-220
	230.0	6315LA-230
	240.0	6315LA-240
Plus module Right 6316LA, 40.0 - 100.0 cm	40.0	6316LA-040
	50.0	6316LA-050
	60.0	6316LA-160
	70.0	6316LA-070
	80.0	6316LA-080
	90.0	6316LA-090
	100.0	6316LA-100
Plus module Right 6316LA , 110.0 - 180.0 cm	110.0	6316LA-110
	120.0	6316LA-120
	130.0	6316LA-130
	140.0	6316LA-140
	150.0	6316LA-150
	160.0	6316LA-160
	170.0	6316LA-170
	180.0	6316LA-180
Plus module Right 6316LA , 190.0 - 240.0 cm	190.0	6316LA-190
	200.0	6316LA-200
	210.0	6316LA-210
	220.0	6316LA-220
	230.0	6316LA-230
	240.0	6316LA-240

Control button, Mini

Wired, for recessed mounting
Diameter: 20 mm

	61318

Safety lock
Prevents unauthorised use.
Dimensions: 23 x 9 mm

	61360

Front, white-lacquered aluminium

Replace xxx with cm when ordering.
Example, 385L-040-01 for 40.0 cm

Lacquered aluminium, white RAL 9003
Height: 40 mm

Optional length, 20.0-340.0 cm	385L-xxx-01

Front, anodised aluminium

Replace xxx with cm when ordering.
Example, 385L-040-06 for 40.0 cm

Anodised aluminium
Height: 40 mm

Optional length, 20.0-340.0 cm	385L-XXX-06

Safety strip

Used if pinch protection is desired on the gable end (by an open side).
Length: 370 mm
Height: 10 mm

	61430

Safety panel, short end
Used when the worktop lift's underside passes over adjoining interior fittings.
Height: 263 mm, Depth: 400 mm
For a worktop lift with cover panels

Left	61442
Right	61443

Safety panel, short end
Used when the worktop lift's underside passes over adjoining furnishings.
Height: 263 mm, Depth: 545 mm
For a worktop lift without cover panels

Left	61444
Right	61445



Hob cover under worktop lift

Provides a smooth underside. Used under the hob.

White-lacquered metal RAL 9003

60.0 cm	6266-060
70.0 cm	6266-070
80.0 cm	6266-080
90.0 cm	6266-090
100.0 cm	6266-100

Cover panels
Used to cover installations under the worktop.

Length is adapted to worktop lift's length.

12 mm white melamine,
2 pcs height 438 mm

2 pcs are required for lengths over 2400 mm	6260-240

Fittings set for cover panels
Used to mount cover panels that conceal installations under the worktop.

Colour: Alu-grey RAL 9006

2 pcs are required for lengths over 2400 mm	6260-005



Rear edge trim in aluminium for top board
Mounted behind top board. Brushed aluminium
Height above top board: 20 mm
Thickness behind top board: 3 mm

(per metre)	6943-06

Height-adjustment kit
Used to change stroke after installation.
Contains programming box and memory adapter.

	61400

GRANBERG

GRANBERG INTERIOR AB
Box 6112
600 06 Norrköping
Sweden
Tel: +46(0)11-19 77 50
Email: info@granberg.se
Internet: www.granberg.se

SINCE 1870

MADE IN SWEDEN

Distributor/Dealer in Australia

Inclusive Living
Australia

Tel: +61 1300 304 330
E-mail: sales@inclusiveliving.com.au
Internet: http://www.inclusiveliving.com.au

Inclusive Living
Australia
www.inclusiveliving.com.au
1300 304 330